








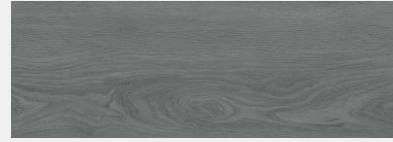


## Nordik Gray Porcelain Floor-Wall Tile

**Referencia/Reference:** 123032501  
**Formato/Format:** 9.4X47.2 in.  
**Color:** Gris/Gray



	TRÁFICO   TRAFFIC	Comercial General / General Commercial
	ACABADO   FINISH	Mate / Matte
	ASPECTO   APPEARANCE	Caras Diferenciadas / Differentiated Faces
	M2 POR CAJA SQ FT APPROX	1,45 15,607655
	UNIDADES   PIECES	5
	PESO BRUTO CAJA kg WEIGHT LB APPROX	22,78 50,22
	ESPESOR NOMINAL NOMINAL THICKNESS	10,5 +/-0,3
	CAJAS POR ESTIBA CARTONS PER PALLET	32
	VOLATILE ORGANIC COMPOUNDS	0

El color presentado en la fotografía es una aproximación al color real.  
The color represented in the photograph is an approximation to the real color.

Floors for use in commercial and institutional areas with an average daily traffic of less than 5,000 people. These floors are also suitable for all residential areas.

**Important:** Do not use for floors in airports, transportation terminals, industries that use heavy machinery, supermarkets and hypermarkets.

**Caution:** With the exception of Corona ARD® Slip Resistance products, ceramic products decrease their slip resistance when in contact with water. In humid areas, products with a high coefficient of friction are recommended. When removing the pallet straps, it is recommended to be careful at the ends to prevent the boxes from falling. It is advisable to handle the product between two people due to the length and weight of the product.

### CHARACTERISTICS, ADVANTAGES AND BENEFITS:

The Nordik Porcelain Floor-Wall Tile in matte finish, Gray color and a 9.4x47.2 format, is a strip with a design inspired by Oak wood with a smooth grain and homogeneous gray tone, ideal for installation in all areas due to its General Commercial use. Highly realistic design due to its different differentiated faces and microstructure, allowing a greater resemblance to natural wood. Non-rectified product. Installation recommendation: 25% offset, ideal for General Commercial use. It has five (5) differentiated faces (CD), tiles with subtle differences between one piece and another to give greater realism and naturalness to the product. Ultra-resistant to blows, scratches, stains and humidity, it also has Digital Printing technology (HIGH DEFINITION HD).

Garantía Corona | Corona quality guaranteed: 12 Años/Years

**Orchid** Ceramics  
by **corona**

## Nordik Gray Porcelain Floor-Wall Tile

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS		ENSAYO   TEST	ESPECIFICACIÓN SPECIFICACION NTC 919 / ISO 13006	MEDICIONES LOTES PROMEDIO CORONA/ CORONA AVERAGE LOT MEASUREMENTS
ANCHO Y LARGO LENGTH AND WIDTH		NTC 4321 - 2 ISO 10545 - 2	(±) 2.00% del tamaño de fabricación; hasta máximo 5 mm	(±) 2.00% del tamaño de fabricación; hasta máximo 5 mm
PLANIRADIDAD DE LA SUPERFICIE SURFACE FLATNESS	Curvatura Central Central Curvature	NTC 4321 - 2 ISO 10545 - 2	(±) 0.50% de la diagonal del tamaño de fabricación	(±) 0.30% de la diagonal del tamaño de fabricación
	Curvatura del lado Edge Curvature	NTC 4321 - 2 ISO 10545 - 2	(±) 0.50% relativa al correspondiente tamaño de fabricación	(±) 0.30% relativa al correspondiente tamaño de fabricación
	Ortogonalidad Warpage	NTC 4321 - 2 ISO 10545 - 2	(±) 0.50% de la diagonal del tamaño de fabricación	(±) 0.30% de la diagonal del tamaño de fabricación
DEFECTOS SUPERFICIALES SURFACE DEFECTS		NTC 4321 - 2 ISO 10545 - 2	Mínimo 95% libre de defectos/ Minimum 95% without defects	Mínimo 95% libre de defectos/ Minimum 95% without defects
ABSORCIÓN DE AGUA WATER ABSORPTION		NTC 4321 - 3 ISO 10545 - 3	Máximo 0.50%	Máximo 0.50%
RESISTENCIA A LA ROTURA BREAKING STRENGTH		NTC 4321 - 4 ISO 10545 - 4	Mínimo 1300 N / Minimum 1300 N	Mínimo 1400 N / Minimum 1400 N
MÓDULO DE ROTURA MODULUS OF RUPTURE		NTC 4321 - 4 ISO 10545 - 4	Mínimo 35 N/mm <sup>2</sup> / Minimum 35 N/mm <sup>2</sup>	Mínimo 35 N/mm <sup>2</sup> / Minimum 35 N/mm <sup>2</sup>
RESISTENCIA A LA ABRASIÓN ABRASION RESISTANCE		NTC 4321 - 7 ISO 10545 - 7	Informe de cumplimiento de la clase de abrasión y los ciclos	Clase 3 / Class 3
COEFICIENTE DE FRICCIÓN DINÁMICO DYNAMIC COEFFICIENT OF FRICTION		NTC 4321 - 17 ISO 10545 - 17	Declarado por el fabricante / Metodo de ensayo disponible	Clase 2/ Class 2
RESISTENCIA AL MANCHADO RESISTANCE TO STAINING		NTC 4321 - 14 NTC 4321 - 14	Mínimo clase 3 / Minimum class 3	Mínimo clase 4 / Minimum class 4
RESISTENCIA A AGENTES QUÍMICOS RESISTANCE TO CHEMICALS		NTC 4321 - 13 NTC 4321-2 - 13	Mínimo clase B / Minimum B class	Mínimo Clase A / Minimum A Class
RESISTENCIA AL CHOQUE TÉRMICO THERMAL SHOCK RESISTANCE		NTC 4321-2 - 9 NTC 4321 - 9	La indicada por el fabricante/Manufacturer to state classification	Mínimo clase BA / Minimum BA class